

WELLPLUM / Commercial MB50 Dimensions and installation



Inner groove size: 560*300*300 mm



Whole machine

#SUS 304

Voltage: 1Φ220V

net weight: 90kg

990mm

760mm

790mm

- Ultrasonic unit

Ultrasonic 800W fixed power output

Drop-in vibrating plate · The vibrator adopts Japan NEC TORKIN oscillating chip material #304 / 2T

- Ozone unit

Retrofit O₃ 臭氧: 0.03~0.066 mg/min / L (200mg/hrs)

convert: 200mg/60 min -L ---> 3.3mg/min-L

This sink is 50L ---> 3.3mg/50L=0.066mg(0.066ppm)

- Airflow filter unit

Install air waterfall system 1/4HP

install filter system 1/2HP/pump + filter

- Fully automatic intake/drainage unit

Installation method:

Water in: 4 or 6 external teeth

Water out: 1 inch pipe

- Operation panel unit

Humanized operation panel, you can also modify the washing program by yourself


Human-machine interface operation

PLC programmable control system

WELLPLUM / Commercial MB80 Dimensions and installation



Inner groove size: 960*295*270 mm

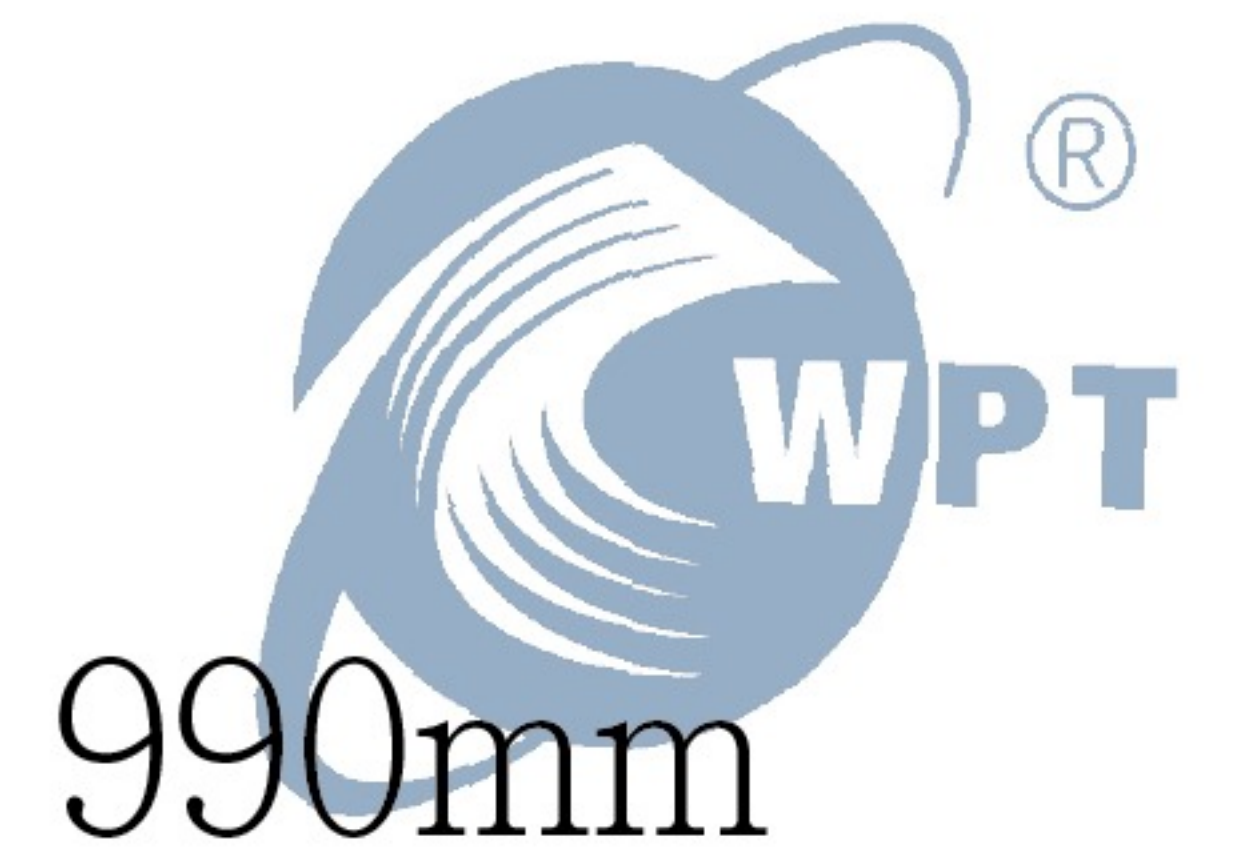

990mm

760mm

1190mm

Whole machine

#SUS 304

Voltage: 1Φ220V

net weight: 120kg

- Ultrasonic unit

Ultrasonic 1200W fixed power output

Drop-in vibrating plate、The vibrator adopts Japan NEC TORKIN oscillating chip material #304 /2T

- Ozone unit

Retrofit O₃ 臭氧: 0.03~0.066 mg/min / L (200mg/hrs)

convert: 200mg/60 min -L ---> 3.3mg/min-L

This sink is 80L ---> 3.3mg/80L=0.042mg(0.042ppm)

- Airflow filter unit

Install air waterfall system 1/4HP

install filter system 1/2HP/pump + filter

- Fully automatic intake/drainage unit

Installation method:

Water in: 4 or 6 external teeth

Water out: 1 inch pipe

- Operation panel unit

Humanized operation panel, you can also modify the washing program by yourself

Human-machine interface operation

PLC programmable control system